

LED FIXTURE

DL Series

LED Eco-Commercial Strip DL-EC


Linear 2', 3', 4' and 8' LED strip light, 120-347V auto-sensing driver




Features & Benefits

- _____ CUL listed
- _____ 2', 3', 4' and 8' length selection
- _____ 120-347V Auto-sensing driver (except 90W), 0-10V dimming
- _____ Average rated life 100,000 hrs L70 (TM-21 @ 70 °C), CRI ≥ 80
- _____ System light efficacy ≥ 130lm per watt
- _____ White metal finish (black available for special order), PMMA Opal Lens
- _____ Surface or Suspended mounting, row mountable w/ joiner plate
- _____ Damp location rated

Dimensional Drawing



Unique J-Box cover supplied

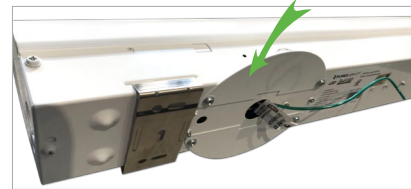

	L	W	H
2FT	22.2"	3.3"	3.6"
3FT	35.0"	3.3"	3.6"
4FT	47.3"	3.3"	3.6"
8FT	94.2"	3.3"	3.6"

Warranty

- _____ 5-year limited warranty in commercial use from the date of purchase
- _____ Operating temperature range between -20°C and +50°C

Applications

Offices, Hallways, Multipurpose Rooms, Warehouse etc.

Ordering Information Example: DL-EC/4F/35W/40/120-347V/D/S

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable	Sensor	Option
DL (Deltalum)	EC (Eco-Commercial)	2F (2')	20W (2')	35 (3500K)	120-347V	D (Dimmable)	S (Sensor)	RM (Row MTG Plate) S (Microwave Sensor) TL-2052 PIR Sensor
		3F (3')	25W (3')	40 (4000K)	UNV (120-277V)			
		4F (4')	35W, 45W, 56W (4')	50 (5000K)	347V			
		8F (8')	65W, 90W (8')					

Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating(L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	M.O.L (inch)
3663209	DL-EC/2F/20W/35/120-347V/D	20	120-347V	100,000	120°	2600	3500	>80	Yes	22.2"
3663208	DL-EC/2F/20W/40/120-347V/D	20	120-347V	100,000	120°	2620	4000	>80	Yes	22.2"
3664206	DL-EC/3F/25W/40/120-347V/D	25	120-347V	100,000	120°	3325	4000	>80	Yes	35.0"
3665250	DL-EC/4F/35W/35/120-347V/D	35	120-347V	100,000	120°	4585	3500	>80	Yes	47.3"
3665225	DL-EC/4F/35W/40/120-347V/D	35	120-347V	100,000	120°	4620	4000	>80	Yes	47.3"
3665226	DL-EC/4F/35W/50/120-347V/D	35	120-347V	100,000	120°	4655	5000	>80	Yes	47.3"
3665251	DL-EC/4F/45W/35/120-347V/D	45	120-347V	100,000	120°	5940	3500	>80	Yes	47.3"
3665227	DL-EC/4F/45W/40/120-347V/D	45	120-347V	100,000	120°	5985	4000	>80	Yes	47.3"



LED Eco-Commercial Strip

DL-EC

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating(L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	M.O.L (inch)
3666300	DL-EC/4F/56W/35/120-347V/D	56	120-347V	100,000	120°	7280	3500	>80	Yes	47.3"
3666247	DL-EC/4F/56W/40/120-347V/D	56	120-347V	100,000	120°	7336	4000	>80	Yes	47.3"
3666240	DL-EC/8F/65W/35/120-347V/D	65	120-347V	100,000	120°	8515	3500	>80	Yes	94.2"
3666229	DL-EC/8F/65W/40/120-347V/D	65	120-347V	100,000	120°	8580	4000	>80	Yes	94.2"
3666230	DL-EC/8F/65W/50/120-347V/D	65	120-347V	100,000	120°	8645	5000	>80	Yes	94.2"
3666146	DL-EC/8F/90W/35/UNV/D	90	120-277V	100,000	120°	11700	3500	>80	Yes	94.2"
3666137	DL-EC/8F/90W/40/UNV/D	90	120-277V	100,000	120°	11790	4000	>80	Yes	94.2"
3666145	DL-EC/8F/90W/50/UNV/D	90	120-277V	100,000	120°	11880	5000	>80	Yes	94.2"
3666250	DL-EC/8F/90W/35/347/D	90	347V	100,000	120°	11610	3500	>80	Yes	94.2"
3666237	DL-EC/8F/90W/40/347V/D	90	347V	100,000	120°	11700	4000	>80	Yes	94.2"
3666249	DL-EC/8F/90W/50/347/D	90	347V	100,000	120°	11790	5000	>80	Yes	94.2"
3663300	DL-EC/2F/20W/40/120-347V/D/S	20	120-347V	100,000	120°	2620	4000	>80	Yes	22.2"
3665253	DL-EC/4F/35W/35/120-347V/D/S	35	120-347V	100,000	120°	4585	3500	>80	Yes	47.3"
3665242	DL-EC/4F/35W/40/120-347V/D/S	35	120-347V	100,000	120°	4620	4000	>80	Yes	47.3"
3665252	DL-EC/4F/45W/35/120-347V/D/S	45	120-347V	100,000	120°	5940	3500	>80	Yes	47.3"
3665246	DL-EC/4F/45W/40/120-347V/D/S	45	120-347V	100,000	120°	5985	4000	>80	Yes	47.3"
3666304	DL-EC/4F/56W/35/120-347V/D/S	56	120-347V	100,000	120°	7280	3500	>80	Yes	47.3"
3666248	DL-EC/4F/56W/40/120-347V/D/S	56	120-347V	100,000	120°	7336	4000	>80	Yes	47.3"
3666305	DL-EC/8F/65W/40/120-347V/D/S	65	120-347V	100,000	120°	8580	4000	>80	Yes	94.2"
3660055	DL-EC/2F/LENS	2ft, replacement white PMMA lens								
3660056	DL-EC/3F/LENS	3ft, replacement white PMMA lens								
3660057	DL-EC/4F/LENS	4ft, replacement white PMMA lens								
3660058	DL-EC/8F/LENS	8ft, replacement white PMMA lens								
3660092	DL-EC/4F/WG	4ft, Wire guard								
Option	DL-EC/RM	Row mounting plate								
	S	Microwave sensor factory installed (consult for lead time)								
	TL-2052	PIR motion sensor (sold separately)								