

LED FIXTURE

PRO Series



LED Slim Panel PRO-SP2/4

Slim design allows it to be installed in low plenum ceilings



3-year limited warranty


Operating temperature range -20° C ~ +40° C



Features & Benefits

- cETLus listed, Energy Star
- Type IC rated – approved for direct contact with insulation
- Isolated internal driver in junction box – fast and easy to install
- Finish colour white, black and brush nickel
- Dimmable triac down to 10%
- L70 @ 25,000 Hrs, CRI ≥80, FT4 cable
- PC lens aluminium body
- Damp location rated

Dimensional Drawing

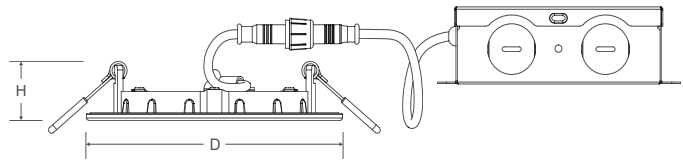

	M.O.D	Cut-out	M.O.H
SP2/4 (4")	5 3/8"	4 1/4"	7/8"

Ordering Information Example: PRO-SP2/4/9W/30/120/WH/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Finish Color	Dimmable	Options
PRO	SP2 (Slim panel)	4 (4")	9W	30 (3000K) 40 (4000K)	120 (120V)	WH (White) BK (Black) BN (Brush nickel)	D (Triac dimmable)	PL-AMP4 (Sell separately)

Product Specification

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Beam Angle	Damp Location	Dimension D×H (inch)	Case QTY.
3662138	Yes	PRO-SP2/4/9W/30/120/WH/D	9	120	25,000	650	3000	>80	120°	Yes	5 3/8" × 7/8"	12
3662155	Yes	PRO-SP2/4/9W/30/120/BK/D	9	120	25,000	650	3000	>80	120°	Yes	5 3/8" × 7/8"	12
3662156	Yes	PRO-SP2/4/9W/30/120/BN/D	9	120	25,000	650	3000	>80	120°	Yes	5 3/8" × 7/8"	12
3662139	Yes	PRO-SP2/4/9W/40/120/WH/D	9	120	25,000	650	4000	>80	120°	Yes	5 3/8" × 7/8"	12
3660059	-	PL-AMP4	NC plate 4"									