

LED FIXTURE

DL Series



LED Vapor Tight DL-VT

Linear 4' or 8' IP65 rated luminaire, suitable for wet locations.



5-year limited warranty

Operating temperature range -20 °C ~ +40 °C

4 FT




8 FT



Features & Benefits

- cUL listed, DLC Premium & Standard
- High impact polycarbonate grey housing, IK08, opal lens
- LED module with LG / Everlight chip, 13
- c/w PG13.5 threaded cable gland
- 130lm/W, 0-10V dimming
- Stainless steel fastening clips and stainless steel mounting brackets included
- L70 @ 50,000 Hrs, CRI ≥80
- IP 65 rated, wet location rated

Dimensional Drawing

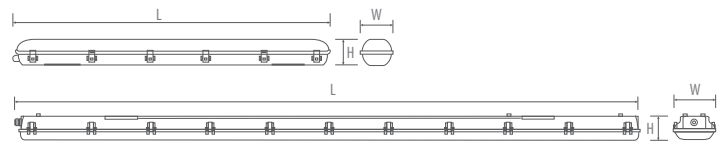

	L	W	H
4FT	48"	4.9"	4.1"
8FT	99"	6.3"	4.3"

Ordering Information Example: DL-VT/4F/40W/35/120-347V/D/S

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable	Options
DL (Deltalum)	VT (Vapor tight)	4F (4') 8F (8')	40W, 60W 80W, 100W, 120W	35 (3500K) 40 (4000K) 50 (5000K)	120-347V UNV (120-277V) HVV (347-480V)	D (0-10V dimming)	S (Microwave sensor, factory installed)

Product Specification

Ordering Code	DLC/DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	M.O.L (inch)	Case QTY.
3665302	No	DL-VT/4F/40W/35/120-347V/D	40W	120-347V	50,000	120°	5,300	3500K	>80	48	4
3665244	Yes Premium	DL-VT/4F/40W/40/120-347V/D	40W	120-347V	50,000	120°	5,432	4000K	>80	48	4
3665245	Yes Premium	DL-VT/4F/40W/50/120-347V/D	40W	120-347V	50,000	120°	5,670	5000K	>80	48	4
3666306	No	DL-VT/4F/60W/35/120-347V/D	60W	120-347V	50,000	120°	7,300	3500K	>80	48	4
3666238	Yes Premium	DL-VT/4F/60W/40/120-347V/D	60W	120-347V	50,000	120°	7,429	4000K	>80	48	4
3666239	Yes Premium	DL-VT/4F/60W/50/120-347V/D	60W	120-347V	50,000	120°	7,511	5000K	>80	48	4
3665305	No	DL-VT/4F/40W/35/120-347V/D/S	40W	120-347V	50,000	120°	5,300	3500K	>80	48	4
3665303	No	DL-VT/4F/40W/40/120-347V/D/S	40W	120-347V	50,000	120°	5,432	4000K	>80	48	4

LED Vapor Tight DL-VT

Ordering Code	DLC/DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	M.O.L (inch)	Case QTY.
3665304	No	DL-VT/4F/40W/50/120-347V/D/S	40W	120-347V	50,000	120°	5,670	5000K	>80	48	4
3666303	No	DL-VT/4F/60W/35/120-347V/D/S	60W	120-347V	50,000	120°	7,300	3500K	>80	48	4
3666301	No	DL-VT/4F/60W/40/120-347V/D/S	60W	120-347V	50,000	120°	7,429	4000K	>80	48	4
3666302	No	DL-VT/4F/60W/50/120-347V/D/S	60W	120-347V	50,000	120°	7,511	5000K	>80	48	4
3666118	Yes	DL-VT/8F/80W/40/UNV/D	80W	120-277V	50,000	120°	10,621	4000K	>80	96	1
3666119	Yes Premium	DL-VT/8F/80W/50/UNV/D	80W	120-277V	50,000	120°	10,743	5000K	>80	96	1
3666218	Yes	DL-VT/8F/80W/40/HVU/D	80W	347V-480V	50,000	120°	10,697	4000K	>80	96	1
3666219	Yes	DL-VT/8F/80W/50/HVU/D	80W	347V-480V	50,000	120°	10,802	5000K	>80	96	1
3666320	-	DL-VT/8F/80W/40/120-347V/D	80W	120-347V	50,000	120°	10,621	4000K	>80	96	1
3666321	-	DL-VT/8F/80W/50/120-347V/D	80W	120-347V	50,000	120°	10,743	5000K	>80	96	1
3666120	No	DL-VT/8F/100W/40/UNV/D	100W	120-277V	50,000	120°	12,500	4000K	>80	96	1
3666221	No	DL-VT/8F/100W/50/UNV/D	100W	120-277V	50,000	120°	12,500	5000K	>80	96	1
3667109	Yes	DL-VT/8F/120W/40/UNV/D	120W	120-277V	50,000	120°	15,765	4000K	>80	96	1
3667110	Yes Premium	DL-VT/8F/120W/50/UNV/D	120W	120-277V	50,000	120°	15,930	5000K	>80	96	1
3667210	Yes	DL-VT/8F/120W/40/HVU/D	120W	347V-480V	50,000	120°	16,662	4000K	>80	96	1
3667211	Yes	DL-VT/8F/120W/50/HVU/D	120W	347V-480V	50,000	120°	16,807	5000K	>80	96	1
3666147	-	DL-VT/8F/80W/40/UNV/D/S	80W	120-277V	50,000	120°	10,621	4000K	>80	96	1
-	-	DL-VT/4F/LENS	DeltaLum vapor tight 4ft opal PC lens								
-	-	DL-VT/8F/LENS	DeltaLum vapor tight 8ft opal PC lens								
-	-	S	Microwave motion sensor, factory installed								