

# LED FIXTURE

PRO Series




## LED Backlit Panel PRO-BLP

Ultra slim LED backlit panel  
Selectable Wattage and Selectable Kelvin (CCT), 120-277V




5-year limited warranty

Operating temperature range -20° C ~ +40° C

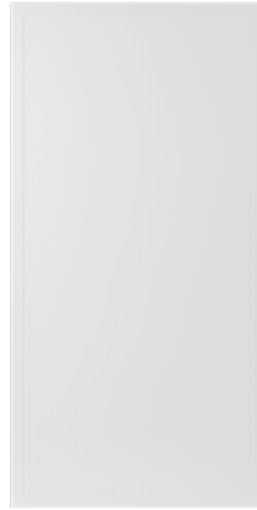

2'x4'

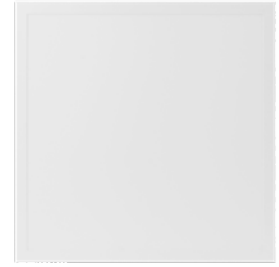


2'x2'

### Features & Benefits

- cULus listed, DLC Premium/ DLC
- Selectable Wattage and Selectable Kelvin (CCT)
- 2 Convenient sizes (2'x4', 2'x2'), no UV & IR emission
- 120-277V, 125lm/W
- L70 @ 50,000 Hrs, CRI ≥80
- 0-10V Dimmable
- Aluminum body
- Damp location rated

### Dimensional Drawing

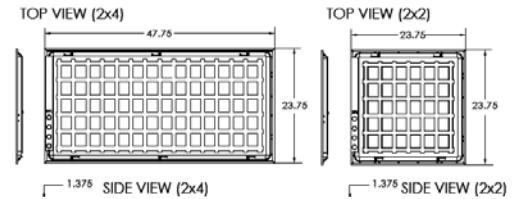

	L	W	H
2'x2'	23.75"	23.75"	1.38"
2'x4'	47.75"	23.75"	1.38"

### Ordering Information Example: PRO-BLP/22/MW/MK/UNV/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable
PRO	BLP (LED backlit panel)	22 (2'x2') 24 (2'x4')	MW (Selectable Wattage)	MK (Selectable CCT)	120 -277V	D (0-10V dimmable)

### Product Specification

Ordering Code	DLC/ DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating (L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	Case QTY.
3680106	Yes	PRO-BLP/22/MW/MK/UNV/D	30-25-20	120-277V	50,000	120	3750-3125-2500	35-40-50	>80	Yes	4
3680105	Yes Premium	PRO-BLP/24/MW/MK/UNV/D	40-35-30	120-277V	50,000	120	5000-4375-3750	35-40-50	>80	Yes	4

