

WAT-M  
Mecanic Control



WAT-BV  
Electronic Control

## An affordable cooling option for the summer!

Designed to be installed inside a window, the WAT series is ideal for cooling rooms with limited space. With four-direction adjustable louvres, window air conditioners reduce unwanted humidity while simultaneously removing the room's heat.

# Window Air Conditioner

WAT Series


**TOSOT**



## MODELS

| Product #                     |                    | GJC05BV-A6NMNC4B-1 | GJC05BV-A6NRNC4B                        | GJC06BV-A6NRNC5B                        | GJC06BV-A6NRNC5B-1                      |   |
|-------------------------------|--------------------|--------------------|---|---|---|---|
| Series                        |                    | WAT-M              | WAT-BV                                  | WAT-BV                                  | WAT-BV                                  |   |
| 2022 New Series               |                    |                    |   | -                                       |   |   |
| ENERGY STAR                   |                    | -                  | -                                       | -                                       | -                                       |   |
| <b>Technical Performance</b>  |                    |                    |   |   |   |   |
| Voltage                       | Volts              | 115                | 115                                     | 115                                     | 115                                     |   |
| Cooling capacity              | Nominal BTU/hr     | 5000               | 5000                                    | 6000                                    | 6000                                    |   |
| Used cooling power input      | Nominal W          | 450                | 450                                     | 540                                     | 540                                     |   |
| Used rated input              | W                  | 505                | 505                                     | 545                                     | 625                                     |   |
| Rated current                 | A                  | 4.5                | 4.5                                     | 5.5                                     | 5.5                                     |   |
| Energy Efficiency Rating      | EER                | 11                 | 11                                      | 11                                      | 11                                      |   |
| Air flow volume               | m <sup>3</sup> /hr | 265 / 225          | 265 / 245 / 225                         | 250 / 240 / 230                         | 255 / 235 / 215                         |   |
|                               | cfm                | 156 / 132          | 156 / 144 / 132                         | 147 / 141 / 135                         | 150 / 138 / 127                         |   |
| Dehumidification              | l/hr               | 0.65               | 0.65                                    | 0.85                                    | 0.85                                    |   |
|                               | pt/hr              | 1.37               | 1.37                                    | 1.8                                     | 1.8                                     |   |
| Application area              | sq. ft. (sq. m)    | 150 (14)           | 150 (14)                                | 200 (19)                                | 250 (23)                                |   |
| Cooling speed                 | r/min              | 1550 / 1400        | 1550 / 1480 / 1400                      | 1550 / 1510 / 1450                      | 1520 / 1460 / 1400                      |   |
| Sound level                   | dB (A)             | 65 / 63            | 65 / 64 / 63                            | 66 / 64 / 63                            | 65 / 64 / 63                            |   |
| Operating ambient temperature | °C (°F)            | 65 - 104 (18 - 40) | 65 - 104 (18 - 40)                      | 65 - 86 (18 - 30)                       | 65 - 104 (18 - 40)                      |   |
| Refrigerant                   |                    | R32                | R32                                     | R32                                     | R32                                     |   |
| <b>Functions</b>              |                    |                    |   |   |   |   |
| Control                       |                    | Mecanic            | Electronic                              | Electronic                              | Electronic                              |   |
| Auto fan                      |                    |                    |   |   |   |   |
| Timer                         |                    | -                  |   |   |   |   |
| Energy saving mode            |                    | -                  |   |   |   |   |
| Fan Speeds Mode with X speeds |                    | 2                  | 3                                       | 3                                       | 3                                       |   |
| Dehumidity                    |                    | -                  |   |   |   |   |
| I FEEL                        |                    | -                  |   |   |   |   |
| Night mode                    |                    | -                  |   |   |   |   |
| Memory                        |                    | -                  |   |   |   |   |
| Self-diagnosis                |                    | -                  |   |   |   |   |
| <b>Includes</b>               |                    |                    |   |   |   |   |
| Washable filter               |                    |                    |   |   |   |   |
| Remote control with battery   |                    | -                  |   |   |   |   |
| Window filling panel          |                    |                    |   |   |   |   |
| Mounting hardware             |                    |                    |   |   |   |   |
| <b>Dimension</b>              |                    |                    |   |   |   |   |
| Product dimension             | W x H x D          | in. (mm)           | 16.063 x 11.89 x 13.7 (408 x 302 x 348) | 16.063 x 11.89 x 13.7 (408 x 302 x 348) | 16.063 x 11.89 x 13.6 (408 x 302 x 348) | 16.063 x 11.89 x 13.7 (408 x 302 x 348) |

Standard color: White

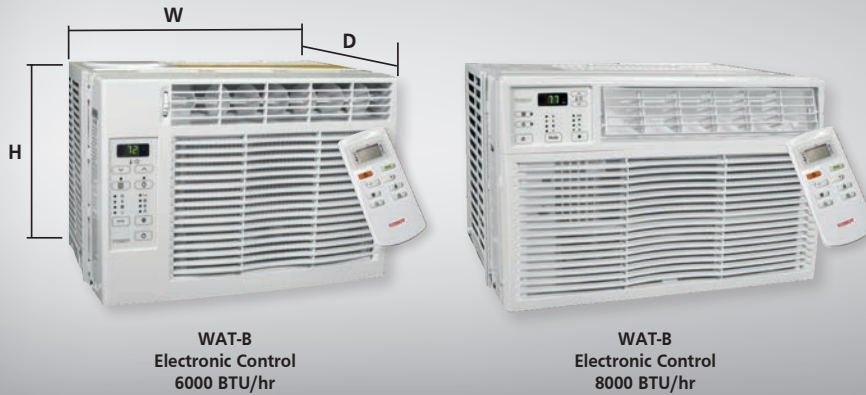

**An affordable cooling option for the summer!**

Designed to be installed inside a window, the WAT series is ideal for cooling rooms with limited space. With four-direction adjustable louvres, window air conditioners reduce unwanted humidity while simultaneously removing the room's heat.

## > Window Air Conditioner

WAT Series

**TOSOT**



### MODELS



| Product #                     |                    | GJC06BK-A6NRNC5B   | GJC08BK-A6NRNC5C                           | GJC08BK-A6NRNC5B                           | GJC08BK-A6NRNC5D                           |
|-------------------------------|--------------------|--------------------|--|--|--|
| Series                        |                    | WAT-B              | WAT B                                      | WAT B                                      | WAT B                                      |
| 2022 New Series               |                    |                    |  | -  |  |
| ENERGY STAR                   |                    |                    | -  |  |  |
| <b>Technical Performance</b>  |                    |                    |  |  |  |
| Voltage                       | Volts              | 115                | 115  | 115  | 115  |
| Cooling capacity              | Nominal BTU/hr     | 6000               | 8000                                       | 8000                                       | 8000                                       |
| Used cooling power input      | Nominal W          | 490                | 730  | 660  | 660  |
| Used rated input              | W                  | 600                | 900  | 850  | 850  |
| Rated current                 | A                  | 5.1                | 7.4  | 6.6  | 6.6  |
| Energy Efficiency Rating      | EER                | 12.1               | 11   | 12.1                                       | 12   |
| Air flow volume               | m <sup>3</sup> /hr | 300 / 280 / 260    | 360 / 340 / 320                            | 360 / 340 / 320                            | 360 / 340 / 320                            |
|                               | cfm                | 177 / 165 / 153    | 212 / 200 / 188                            | 212 / 200 / 188                            | 212 / 200 / 188                            |
| Dehumidification              | l/hr               | 0.78               | 1.17                                       | 1.17                                       | 1.17                                       |
|                               | pt/hr              | 1.65               | 2.473                                      | 2.473                                      | 2.473                                      |
| Application area              | sq. ft. (sq. m)    | 250 (23)           | 350 (32)                                   | 300 (28)                                   | 350 (32)                                   |
| Cooling speed                 | r/min              | 1100 / 970 / 850   | 1610 / 1420 / 1230                         | 1600 / 1500 / 1400                         | 1600 / 1500 / 1400                         |
| Sound level                   | dB (A)             | 66 / 64 / 62       | 72 / 66 / 63                               | 69 / 66 / 63                               | 72 / 66 / 63                               |
| Operating ambient temperature | °C (°F)            | 65 - 104 (18 - 40) | 65 - 104 (18 - 40)                         | 65 - 104 (18 - 40)                         | 65 - 104 (18 - 40)                         |
| Refrigerant                   |                    | R32                | R32  | R32  | R32  |
| <b>Functions</b>              |                    |                    |  |  |  |
| Control                       |                    | Électronique       | Électronique                               | Électronique                               | Électronique                               |
| Auto fan                      |                    |                    |  |  |  |
| Timer                         |                    |                    |  |  |  |
| Energy saving mode            |                    |                    |  |  |  |
| Fan Speeds Mode with X speeds |                    | 3                  | 3  | 3  | 3  |
| Dehumidity                    |                    |                    |  |  |  |
| I FEEL                        |                    |                    |  |  |  |
| Night mode                    |                    |                    |  |  |  |
| Memory                        |                    |                    |  |  |  |
| Self-diagnosis                |                    |                    |  |  |  |
| <b>Includes</b>               |                    |                    |  |  |  |
| Washable filter               |                    |                    |  |  |  |
| Remote control with battery   |                    | -                  |  |  |  |
| Window filling panel          |                    |                    |  |  |  |
| Mounting hardware             |                    |                    |  |  |  |
| <b>Dimension</b>              |                    |                    |  |  |  |
| Product dimension             | W x H x D          | in. (mm)           | 18.583 x 12.756 x 15.748 (472 x 324 x 400) | 18.583 x 12.756 x 15.748 (472 x 324 x 400) | 18.583 x 12.756 x 15.748 (472 x 324 x 400) |

Standard color: White



WAT-B  
Electronic Control  
10000 & 12000 BTU/hr

## An affordable cooling option for the summer!

Designed to be installed inside a window, the WAT series is ideal for cooling rooms with limited space. With four-direction adjustable louvres, window air conditioners reduce unwanted humidity while simultaneously removing the room's heat.

# > Window Air Conditioner

WAT Series

**TOSOT**



## MODELS

| Product #                     |                    | GJC10BL-A6NRNC5H                              | GJC12BR-A6NRNC5C                              |
|-------------------------------|--------------------|---|---|
| Series                        |                    | WAT-B   | WAT-B   |
| 2022 New Series               |                    |   | -   |
| ENERGY STAR                   |                    |   |   |
| <b>Technical Performance</b>  |                    |   |   |
| Voltage                       | Volts              | 115   | 115   |
| Cooling capacity              | Nominal BTU/hr     | 10000   | 12100   |
| Used cooling power input      | Nominal W          | 825   | 1000  |
| Used rated input              | W                  | 1100  | 1150  |
| Rated current                 | A                  | 8.9   | 10.3  |
| Energy Efficiency Rating      | EER                | 12  | 12.1  |
| Air flow volume               | m <sup>3</sup> /hr | 450 / 420 / 390                               | 500 / 450 / 400                               |
|                               | cfm                | 265 / 247 / 230                               | 294 / 265 / 235                               |
| Dehumidification              | l/hr               | 1.44  | 1.76  |
|                               | pt/hr              | 3.04  | 3.72  |
| Application area              | sq. ft. (sq. m)    | 450 (41)                                      | 500 (46)                                      |
| Cooling speed                 | r/min              | 1620 / 1520 / 1420                            | 1550 / 1450 / 1350                            |
| Sound level                   | dB (A)             | 69 / 67 / 65                                  | 69 / 67 / 65                                  |
| Operating ambient temperature | °C (°F)            | 65 - 104 (18 - 40)                            | 66 - 104 (18 - 40)                            |
| Refrigerant                   |                    | R32   | R32   |
| <b>Functions</b>              |                    |   |   |
| Control                       |                    | Électronique                                  | Électronique                                  |
| Auto fan                      |                    |   |   |
| Timer                         |                    |   |   |
| Energy saving mode            |                    |   |   |
| Fan Speeds Mode with X speeds |                    | 3   | 3   |
| Dehumidity                    |                    |   |   |
| I FEEL                        |                    |   |   |
| Night mode                    |                    |   |   |
| Memory                        |                    |   |   |
| Self-diagnosis                |                    |   |   |
| <b>Includes</b>               |                    |   |   |
| Washable filter               |                    |   |   |
| Remote control with battery   |                    |   |   |
| Window filling panel          |                    |   |   |
| Mounting hardware             |                    |   |   |
| <b>Dimension</b>              |                    |   |   |
| Product dimension             | W x H x D          | in. (mm)                                      |   |
|                               |                    |   |   |
|                               |                    | 19.016 x 14.567 x 21.259<br>(483 x 370 x 540) | 21.339 x 15.748 x 21.457<br>(542 x 400 x 545) |

Standard color: White



## FEATURES

### IMPROVED AIR QUALITY – 3-IN-1

As well as an air conditioner, the unit helps to reduce humidity and mold, which improves the breathable air in the room.

### COMPACT AND ECONOMIC

Enjoy cooler rooms at an affordable price.

### DURABLE

Includes an anti-corrosive cover to prevent deterioration.

### CLASSIC DESIGN

An understated look that blends into any room.

### EASY TO CLEAN

Washable and reusable filter.

## WARRANTY

- 1-year against defects


### 24H PROGRAMMABLE TIMER<sup>1</sup>

The integrated timer can be used to start the air conditioning before you get home and stop it when you leave.

### USEFUL FEATURES<sup>1</sup>

- Programmable timer
- Night mode
- Energy saving mode
- Dehumidification mode
- “I Feel” mode
- 3-speed automatic ventilation
- Automatic restart function
- Includes wireless remote

<sup>1</sup> Except the WAT-M model.

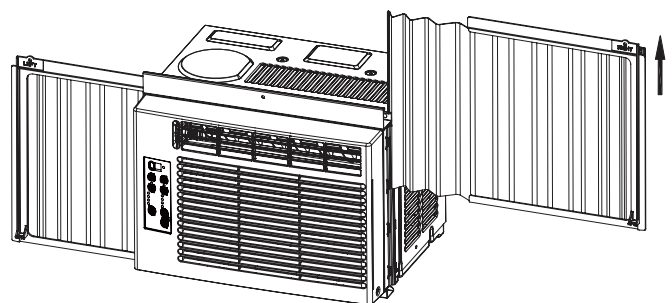



WAT-BU  
Electronic Control  
Ultra Quiet

## Quieter than a whisper!

Designed to be installed inside a window, the WAT series is ideal for cooling rooms with limited space. With four-direction adjustable louvres, window air conditioners reduce unwanted humidity while simultaneously removing the room's heat.

# > Window Air Conditioner

WAT Series

**TOSOT**



## MODEL

|                               |                    |                    |  |
|-------------------------------|--------------------|--------------------|--|
| Product #                     |                    |                    | <b>GJC08BU-A6NRNJ2A</b>                      |
| Series                        |                    |                    | <b>WAT BU</b>                                |
| 2022 New Series               |                    |                    |  |
| ENERGY STAR                   |                    |                    |  |
| <b>Technical Performance</b>  |                    |                    |  |
| Voltage                       | Volts              | 115                |  |
| Cooling capacity              | Nominal<br>BTU/hr  | 8000               |  |
| Used cooling power input      | Nominal<br>W       | 660                |  |
| Used rated input              | W                  | 780                |  |
| Rated current                 | A                  | 6.9                |  |
| Energy Efficiency Rating      | EER                | 12                 |  |
| Air flow volume               | m <sup>3</sup> /hr | 360 / 340 / 320    |  |
|                               | cfm                | 212 / 200 / 188    |  |
| Dehumidification              | l/hr               | 1.15               |  |
|                               | pt/hr              | 2.43               |  |
| Application area              | sq. ft.<br>(sq. m) | 350 (32)           |  |
| Cooling speed                 | r/min              | 1450 / 1330 / 1100 |  |
| Sound level                   | dB (A)             | 59 / 57 / 52       |  |
| Operating ambient temperature | °C (°F)            | 65 - 104 (18 - 40) |  |
| Refrigerant                   |                    | R32                |  |
| <b>Functions</b>              |                    |                    |  |
| Control                       |                    |                    | Électronique                                 |
| Auto fan                      |                    |                    |  |
| Timer                         |                    |                    |  |
| Energy saving mode            |                    |                    |  |
| Fan Speeds Mode with X speeds |                    |                    | 3  |
| Dehumidity                    |                    |                    |  |
| I FEEL                        |                    |                    |  |
| Night mode                    |                    |                    |  |
| Memory                        |                    |                    |  |
| Self-diagnosis                |                    |                    |  |
| <b>Includes</b>               |                    |                    |  |
| Washable filter               |                    |                    |  |
| Remote control with battery   |                    |                    |  |
| Window filling panel          |                    |                    |  |
| Mounting hardware             |                    |                    |  |
| <b>Dimension</b>              |                    |                    |  |
| Product dimension             | W x H x D          | in.<br>(mm)        | 21.339 x 13.74 x 18.779<br>(542 x 349 x 477) |

Standard color: White



## FEATURES

### QUIETER THAN A WHISPER

The heater's design was revisited to minimize the unit's noise footprint. It now has a noise output of 52 to 59 decibels.

### IMPROVED AIR QUALITY – 3-IN-1

As well as an air conditioner, the unit helps to reduce humidity and mold, which improves the breathable air in the room.

### COMPACT AND ECONOMIC

Enjoy cooler rooms at an affordable price.

### DURABLE

Includes an anti-corrosive cover to prevent deterioration.

### CLASSIC DESIGN

An understated look that blends into any room.

## WARRANTY

- 1-year against defects

### EASY TO CLEAN

Washable and reusable filter.

### 24H PROGRAMMABLE TIMER

The integrated timer can be used to start the air conditioning before you get home and stop it when you leave.

### USEFUL FEATURES

- Programmable timer
- Night mode
- Energy saving mode
- Dehumidification mode
- "I Feel" mode
- 3-speed automatic ventilation
- Automatic restart function
- Includes wireless remote

