

LED FIXTURE

RIGID Series

LED Slim Panel

RGD-SP

Slim design allows it to be installed in low plenum ceilings.



Features & Benefits

- _____ Type IC Rated – approved for direct contact with insulation, FT4 rated cable
- _____ Isolated internal driver in junction box – fast and easy to install
- _____ Range of sizes (4", 6", 8" available)
- _____ Finish Color White (Black and Brush Nickel trim ring)
- _____ Wet location rated
- _____ J-Box c/w 3x3 wire quick connectors, allowing for easy through wiring
- _____ Interchangeable trim ring for black or brushed nickel finish

- _____ Energy Star approved*
- _____ L70 @ 50,000 Hrs
- _____ Dimmable Triac
- _____ High CRI (80+)
- _____ 120V LED Driver, PF>0.9
- _____ PC lens aluminium body

Warranty



- _____ 5-year limited warranty in commercial use from the date of purchase
- _____ Operating temperature range between -20°C and +40°C

Applications

Residential / Commercial, Schools, Retirement Homes, University, Supermarkets, Shops, Hotels, Conference Rooms, Office Lighting, Show Room, Corridor, Kitchens etc.

* ES under qualifying process Q2, 2018

Dimensional drawing

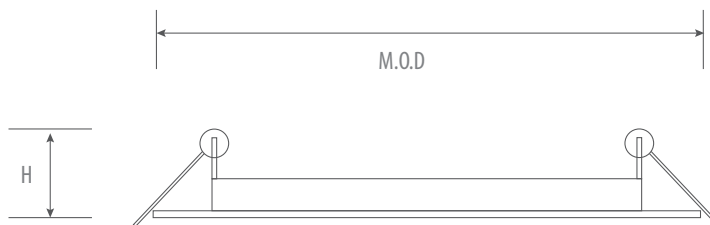

	M.O.D	Cut-Out	H
SP4	4.75"	4.06"	1.25"
SP6	6.75"	5.91"	1.25"
SP8	9.13"	8.07"	1.25"



LED Slim Panel

RGD-SP

Ordering Information Example: RGD-SP/4/8.5W/30/WH/D

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Finish Color	D	Options
RGD (Rigid)	SP (Slim Panel)	4 (4") 6 (6") 8 (8")	8.5W 10.5W 24.5W	30 (3000K) 40 (4000K)	WH (White)	D (Dimmable)	Black Trim Ring Brush Nickel Trim Ring

Product Specification

Ordering Code	ES	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Wet Location	Damp Location	Dimension D×H (inch)	Case QTY.
3662113	Yes	RGD-SP/4/8.5W/30/WH/D	8.5	120	50,000	700	3000	>80	Yes	Yes	4 3/4" × 1 1/4"	6
3662116	Yes	RGD-SP/4/8.5W/40/WH/D	8.5	120	50,000	800	4000	>80	Yes	Yes	4 3/4" × 1 1/4"	6
3662119	Yes	RGD-SP/6/10.5W/30/WH/D	10.5	120	50,000	980	3000	>80	Yes	Yes	6 3/4" × 1 1/4"	6
3662122	Yes	RGD-SP/6/10.5W/40/WH/D	10.5	120	50,000	1070	4000	>80	Yes	Yes	6 3/4" × 1 1/4"	6
3664112	Yes	RGD-SP/8/24.5W/30/WH/D	24.5	120	50,000	2130	3000	>80	Yes	Yes	9 1/8" × 1 1/4"	6
3664114	Yes	RGD-SP/8/24.5W/40/WH/D	24.5	120	50,000	2330	4000	>80	Yes	Yes	9 1/8" × 1 1/4"	6
3662114		RGD-SP/4/BK	RIGID 4" Slim Panel, Black Trim Ring			4 3/4"						
3662115		RGD-SP/4/BN	RIGID 4" Slim Panel, Brush Nickel Trim Ring			4 3/4"						
3662120		RGD-SP/6/BK	RIGID 6" Slim Panel, Black Trim Ring			6 3/4"						
3662121		RGD-SP/6/BN	RIGID 6" Slim Panel, Brush Nickel Trim Ring			6 3/4"						
3664113		RGD-SP/8/BN	RIGID 8" Slim Panel, Brush Nickel Trim Ring			9 1/8"						
3664115		RGD-SP/8/BN	RIGID 8" Slim Panel, Brush Nickel Trim Ring			9 1/8"						